


# HEAVY GAUGE WATERTIGHT FLEXIBLE CONDUIT & ADAPTOR (EF TYPE)

## Watertight Flexible Conduit (EF Type)

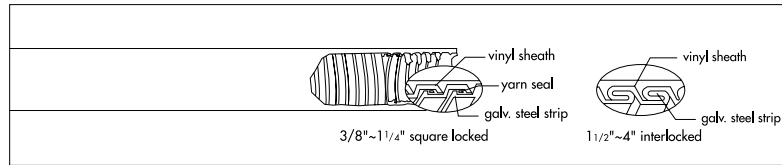

QTY/ PACK	CAT. NOS	SIZE (INCH)	VINYL SHEATH THICKNESS (mm)	MIN. BENDING RADIUS (mm)	COIL (m)
1	OPBA 206703	3/8	1.0	60	50
1	OPBA 206704	1/2	1.0	80	50
1	OPBA 206704T	1/2	1.0	80	50
1	OPBA 206706	3/4	1.0	100	30
1	OPBA 206706T	3/4	1.0	100	30
1	OPBA 206710	1	1.0	150	30
1	OPBA 206712	1 1/4	1.5	180	20
1	OPBA 206714	1 1/2	1.5	220	20
1	OPBA 206720	2	1.5	250	15
1	OPBA 206724	2 1/2	2.0	300	10
1	OPBA 206730	3	2.0	450	10
1	OPBA 206740	4	2.0	600	5

- Galvanized steel core, with flame retardent PVC coated.
- High flexibility, absolutely moisture-proof.
- Absorbs motion, vibration and bending indenfinately.
- Cord packing size form 3/8" through 1-1/4" by squarelocked. 1-1/2" through 4" by interlocked.
- Temperature range from - 10 °C ~ +70 °C.
- IP66 Dust / weatherproof

\*T= Sirim tested

## Watertight Straight Adaptor



QTY/ PACK	CAT. NOS	SIZE (INCH)	THREAD
100	OPBB 210103	3/8	MM/NPT
100	OPBB 210104	1/2	MM/NPT
100	OPBB 210106	3/4	MM/NPT
100	OPBB 210110	1	MM/NPT
100	OPBB 210112	1 1/4	NPT
100	OPBB 210114	1 1/2	NPT
100	OPBB 210120	2	NPT
100	OPBB 210124	2 1/2	NPT
100	OPBB 210130	3	NPT
100	OPBB 210140	4	NPT

## Watertight 90° Elbow Adaptor



QTY/ PACK	CAT. NOS	SIZE (INCH)	THREAD
100	OPBL 210103	3/8	NPT
100	OPBL 210104	1/2	NPT
100	OPBL 210106	3/4	NPT
100	OPBL 210110	1	NPT
100	OPBL 210112	1 1/4	NPT
100	OPBL 210114	1 1/2	NPT
100	OPBL 210120	2	NPT
100	OPBL 210124	2 1/2	NPT
100	OPBL 210130	3	NPT
100	OPBL 210140	4	NPT

## Watertight Coupling



QTY/ PACK	CAT. NOS	SIZE (INCH)	THREAD
100	OPBC 210103	3/8	PT
100	OPBC 210104	1/2	PT
100	OPBC 210106	3/4	PT
100	OPBC 210110	1	PT
100	OPBC 210112	1 1/4	NPT
100	OPBC 210114	1 1/2	NPT
100	OPBC 210120	2	NPT

MM – yellow, NPT- blue